

JT SLk(B) 715-755W

Dual-glass Monocrystalline Solar Module

132 Cells / HJT / Fiberglass frame / 24.3% Maximum Efficiency



KEY FEATURES



Excellent power generation performance

Advanced technology, maximum efficiency 24.3%
Bifacial cell, additional 5%-30% more yield



Leading HJT Technology

A fusion of N-type wafer-based solar cell technology and thin-film PV
High-efficiency cell structure and special anti-reflective glass increase higher power output



Excellent low light performance

Excellent low light performance on cloudy days, mornings and evenings
Lower thermal coefficients and power loss under high temperature



Material-grade anti-corrosion

Passed strict salt spray test, perfectly resisting seawater erosion, salt spray crystallization and penetration of acid and alkali media, meeting the long-term durability requirements of the marine scene



Green and low carbon footprint

The collaborative innovation of HJT cells and eco-friendly fiberglass materials realizes a low-carbon breakthrough in the whole industry chain

QUALIFICATIONS & CERTIFICATES

- IEC 61215, IEC 61730, IEC 62941
- ISO 9001: Quality Management System
- ISO 14001: Environment Management System
- ISO 45001: Occupational Health and Safety

JETION SOLAR

As a member of CNBM - a Fortune 500 company, Jetion Solar provides various product solutions, global EPC service and financing. Its standard and high-efficiency product offerings are among the most powerful and cost-effective in the industry. Till now, Jetion Solar has cumulatively more than 20 GW module shipment and 1 GW global EPC track records.


WARRANTY



Product
Warranty



Performance
Warranty

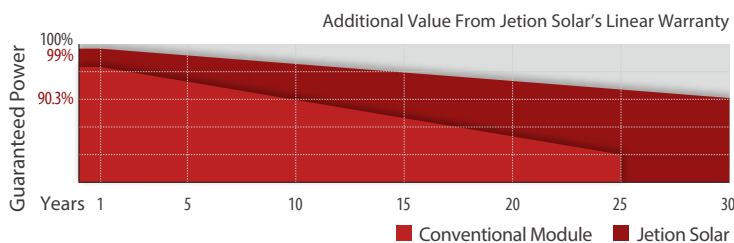

Jetion Solar (China) Co., Ltd.

Add: 1011 Zhencheng Road, Jiangyin, Jiangsu Province, P.R. China 214443
Tel: +86 (510) 8668 7300
E-mail: marketing@jetion.com.cn
Web: www.jetionsolar.com



ELECTRICAL DATA *STC

Measuring tolerance: ±3%

TYPE (Tolerance: 0 - +5W)	JT715SLk(B)	JT720SLk(B)	JT725SLk(B)	JT730SLk(B)	JT735SLk(B)	JT740SLk(B)	JT745SLk(B)	JT750SLk(B)	JT755SLk(B)
Maximum Power Pmax (W)	715	720	725	730	735	740	745	750	755
Maximum Power Voltage Vmp (V)	42.44	42.48	42.52	42.56	42.60	42.64	42.68	42.72	42.76
Maximum Power Current Imp (A)	16.85	16.95	17.06	17.16	17.26	17.36	17.46	17.56	17.66
Open Circuit Voltage Voc (V)	50.35	50.40	50.45	50.50	50.55	50.60	50.65	50.70	50.75
Short Circuit Current Isc (A)	18.10	18.18	18.26	18.35	18.44	18.53	18.62	18.71	18.80
Module Efficiency (%)	23.0%	23.2%	23.4%	23.5%	23.7%	23.8%	24.0%	24.1%	24.3%

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5

ELECTRICAL DATA *BSTC

Maximum Power Pmax (W)	801.69	807.12	812.98	818.66	824.31	829.77	835.48	841.31	846.89
Maximum Power Voltage Vmp (V)	42.44	42.48	42.52	42.55	42.60	42.64	42.67	42.72	42.76
Maximum Power Current Imp (A)	18.89	19.00	19.12	19.24	19.35	19.46	19.58	19.69	19.81
Open Circuit Voltage Voc (V)	50.35	50.40	50.45	50.50	50.55	50.60	50.65	50.70	50.75
Short Circuit Current Isc (A)	20.30	20.39	20.48	20.58	20.68	20.78	20.88	20.98	21.08

BSTC : Front side irradiation 1000W/m², back side reflection irradiation 135W/m², spectrum AM1.5, ambient temperature 25°C.

Values are based on RETC certified results from a light-soaked module.

TEMPERATURE RATINGS

Temperature Coefficient of Isc (αIsc)	+0.040%/°C
Temperature Coefficient of Voc (βVoc)	-0.24%/°C
Temperature Coefficient of Pmax (γPmp)	-0.24%/°C
Normal Module Operating Temperature (NMOT)	43°C±3°C

OPERATING PARAMETERS

Maximum System Voltage	1500V/DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	35A
Maximum Test Load,Push/Pull	5400Pa/2400Pa
Conductivity at Ground	≤ 0.1Ω
Safety Class	II
Resistance	≥100MΩ
Voc and Isc Tolerance	±3%
Bifaciality	90±5%


MECHANICAL DATA

Solar Cell Type	Mono 210×105 mm(8.3×4.1 inches)
Number of Cells	132 [2 x (11 x 6)]
Module Dimensions	2384×1303×35 mm(93.9×51.3×1.4 inches)
Weight	38.2 kg(84.2 lb)
Front Cover	High transmission, AR coated tempered glass, 2.0mm
Back Cover	High transmission, Tempered, White Grid Glass/AR coating(optional), 2.0mm
Frame	Black, Fiberglass
J-Box	≥IP68
Cable	4.0 mm ² solar cable, 400mm(+)/200mm(-)
Number of diodes	3



PACKAGING CONFIGURATION

Module per pallet	31 pieces
Module per 40'HQ container	18 pallets, 558 pieces

IV Curves of JT730SLk(B) at different irradiances

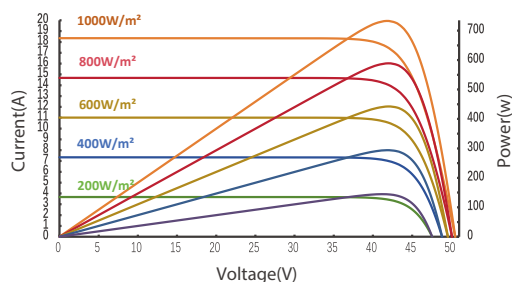

IV Curves of JT730SLk(B) at different Temp

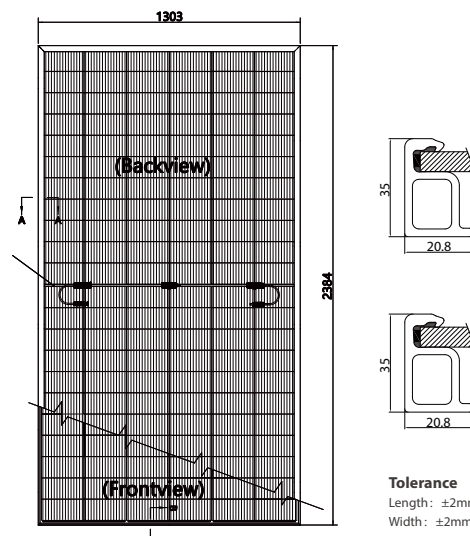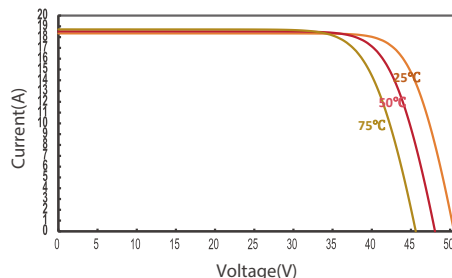

*Installation instruction must be followed. See the installation manual or contact our technical service department for further information on approved installation.

*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Jieton Solar (China) Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein. Jieton Solar_REV_2026_06_EN

