

# JT SLk(B) 690-720W

## Dual-glass Monocrystalline Solar Module

132 Cells / HJT / Fiberglass frame / 23.2% Maximum Efficiency



### KEY FEATURES



#### Excellent power generation performance

Advanced technology, maximum efficiency 23.2%  
Bifacial cell, additional 5%-30% more yield



#### Leading HJT Technology

A fusion of N-type wafer-based solar cell technology and thin-film PV  
High-efficiency cell structure and special anti-reflective glass increase higher power output



#### Excellent low light performance

Excellent low light performance on cloudy days, mornings and evenings  
Lower thermal coefficients and power loss under high temperature



#### Material-grade anti-corrosion

Passed strict salt spray test, perfectly resisting seawater erosion,  
salt spray crystallization and penetration of acid and alkali media,  
meeting the long-term durability requirements of the marine scene



#### Green and low carbon footprint

The collaborative innovation of HJT cells and eco-friendly fiberglass  
materials realizes a low-carbon breakthrough in the whole industry chain

### QUALIFICATIONS & CERTIFICATES

- IEC 61215, IEC 61730, IEC 62941
- ISO 9001: Quality Management System
- ISO 14001: Environment Management System
- ISO 45001: Occupational Health and Safety

### JETION SOLAR

As a member of CNBM - a Fortune 500 company, Jetion Solar provides various product solutions, global EPC service and financing. Its standard and high-efficiency product offerings are among the most powerful and cost-effective in the industry. Till now, Jetion Solar has cumulatively more than 20 GW module shipment and 1 GW global EPC track records.


### WARRANTY



Product  
Warranty



Performance  
Warranty

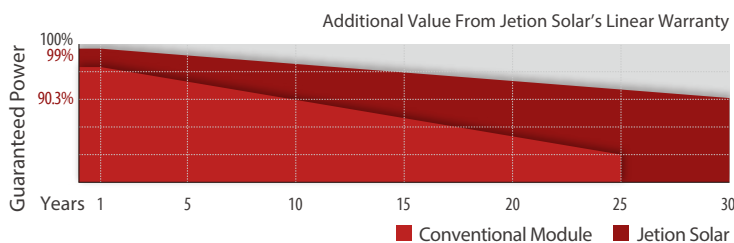


#### Jetion Solar (China) Co., Ltd.

Add: 1011 Zhencheng Road, Jiangyin, Jiangsu Province, P.R. China 214443  
Tel: +86 (510) 8668 7300  
E-mail: marketing@jetion.com.cn  
Web: www.jetionsolar.com




## IV CURVES

IV Curves of JT700SLk(B) at different irradiances

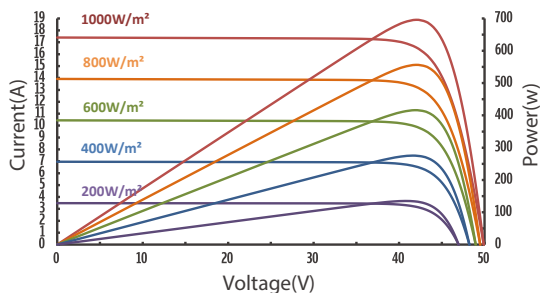

IV Curves of JT700SLk(B) at different Temp

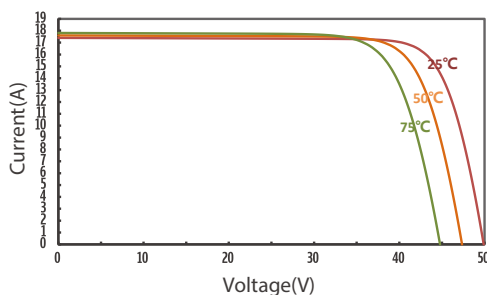

## ELECTRICAL DATA \*STC

TYPE (Tolerance: 0~+5W)	JT690SLk(B)	JT695SLk(B)	JT700SLk(B)	JT705SLk(B)	JT710SLk(B)	JT715SLk(B)	JT720SLk(B)
Maximum Power Pmax (W)	690	695	700	705	710	715	720
Maximum Power Voltage Vmp (V)	41.8	41.95	42.1	42.25	42.4	42.44	42.48
Maximum Power Current Imp (A)	16.51	16.57	16.63	16.69	16.75	16.85	16.95
Open Circuit Voltage Voc (V)	49.70	49.85	50.00	50.15	50.30	50.35	50.40
Short Circuit Current Isc (A)	17.31	17.37	17.43	17.49	17.55	18.10	18.18
Module Efficiency (%)	22.2%	22.4%	22.5%	22.7%	22.9%	23.0%	23.2%

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5

Measuring tolerance: ±3%

## BSTC

Maximum Power -Pmax (W)	760.83	766.50	771.77	777.33	782.85	801.69	807.12
Maximum Power Voltage -Vmp (V)	41.85	42.00	42.15	42.30	42.45	42.44	42.48
Maximum Power Current -Imp (A)	18.18	18.25	18.31	18.38	18.44	18.89	19.00
Open Circuit Voltage -Voc (V)	49.90	50.05	50.20	50.35	50.50	50.35	50.40
Short Circuit Current -Isc (A)	19.06	19.13	19.19	19.26	19.32	20.30	20.39

BSTC : Front side irradiation 1000W/m<sup>2</sup>, back side reflection irradiation 135W/m<sup>2</sup>, spectrum AM1.5, ambient temperature 25°C. Values are based on RETC certified results from a light-soaked module.

## TEMPERATURE RATINGS

Temperature Coefficient of Isc (αIsc)	+0.040%/°C
Temperature Coefficient of Voc (βVoc)	-0.24%/°C
Temperature Coefficient of Pmax (γPmp)	-0.24%/°C
Normal Module Operating Temperature (NMOT)	43°C±3°C

## OPERATING PARAMETERS

Maximum System Voltage	1500V/DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	35A
Maximum Test Load, Push/Pull	5400Pa/2400Pa
Conductivity at Ground	≤ 0.1Ω
Safety Class	II
Resistance	≥100MΩ
Voc and Isc Tolerance	±3%
Bifaciality	90±5%


## MECHANICAL DATA

Solar Cell Type	Mono 210×105 mm(8.3×4.1 inches)
Number of Cells	132 [2 x (11 x 6)]
Module Dimensions	2384×1303×35 mm(93.9×51.3×1.4 inches)
Weight	38.2 kg(84.2 lb)
Front Cover	High transmission, AR coated tempered glass, 2.0mm
Back Cover	High transmission, Tempered, White Grid Glass/AR coating(optional), 2.0mm
Frame	Black, Fiberglass
J-Box	≥IP68
Cable	4.0 mm <sup>2</sup> solar cable, 400mm(+)/200mm(-) or 350mm
Number of diodes	3

## PACKAGING CONFIGURATION

Module per pallet	31 pieces
Module per 40'HQ container	18 pallets, 558 pieces

## DIMENSION

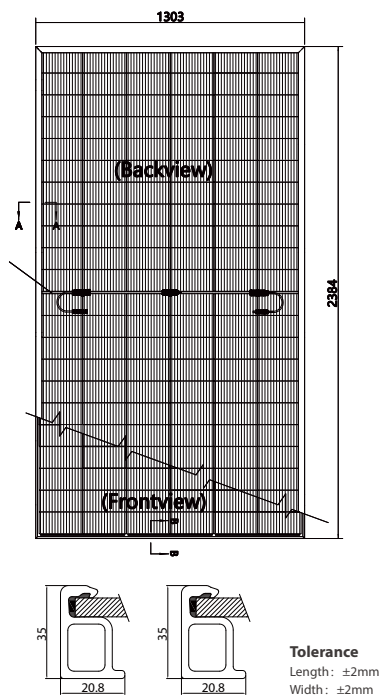

Remarks

\*Installation instruction must be followed. See the installation manual or contact our technical service department for further information on approved installation.

\*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, JETION Solar (China) Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein. JETION Solar\_REV\_2025\_05\_EN

